SINGLE CHANNEL OR DUAL CHANNEL OPTICAL CABLE

DESCRIPTION

Single channel or dual channel optical cable made up of 1 or 2 fibers single mode 9/125 or multimode 50/125 - 62,5/125 – 100/140 – 200/230.

Each fiber is protected by thermoplastic sheath.

This cable for single channel or dual channel is protected by LSOH-OH outer jacket. It complies with flame retardant (IEC 60332-3), halogen free (IEC 60754-1/-2) and low smoke emission (IEC 61034-2).

It has an excellent mechanical stability thanks to fiberglass reinforcement and has rodent protection.

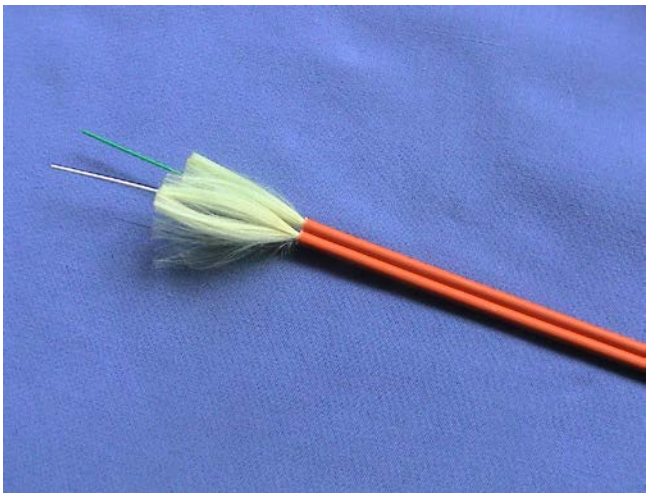

SINGLE CHANNEL OPTICAL CABLE FEATURES

	9/125	50/125	62,5/125	100/140	200/230
Outer diameter in mm	1,6	1,8	2,2x4,6	2,8x5,2	3,5x6,2
Thermoplastic sheath diameter in µm	700	900	900	900	900
Weight in kg/km	3,5	4	4	6	8
Dynamic bend radius in mm	50	50	50	50	50
Operating temperature in °C	-25 à 70	-25 à 70	-25 à 70	-25 à 70	-25 à 70

DUAL CHANNEL OPTICAL CABLE FEATURES

	9/125	50/125	62,5/125	100/140	200/230
Outer diameter in mm	2x3,6	2,2x4,4	2,2x4,6	2,8x5,2	3,5x6,2
Thermoplastic sheath diameter in µm	700	900	900	900	900
Weight in kg/km	7	17	17	22	25
Dynamic bend radius in mm	50	50	50	50	50
Operating temperature in °C	-25 à 70	-25 à 70	-25 à 70	-25 à 70	-25 à 70

SINGLE CHANNEL OPTICAL CABLE REFERENCE

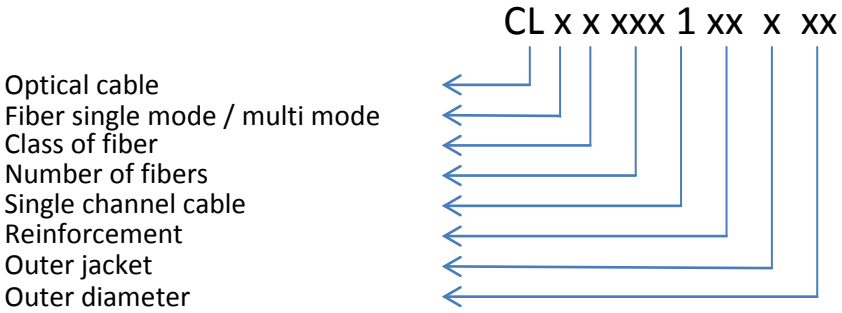

DUAL CHANNEL OPTICAL CABLE REFERENCE

