


BREAK-OUT CABLE

DESCRIPTION

Multichannel optical cable with tight structure from 2 to 12 fibers 9/125 - 50/125 - 62,5/125.

Each fiber unit is sheathed at 900µm then sheathed at 2mm with LSOH-FR outer jacket. It complies with flame retardant (IEC 60332-3), halogen free (IEC 60754-1/-2) and low smoke emission (IEC 61034-2).

It has an excellent mechanical stability thanks to fiberglass reinforcement and has rodent protection.

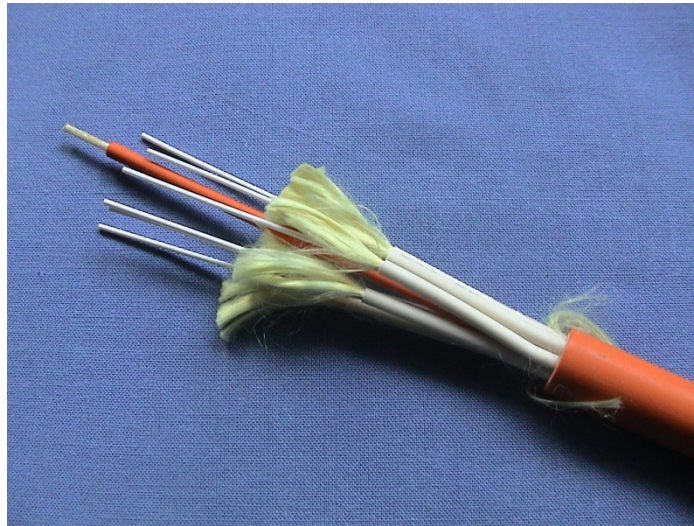

BREAK-OUT CABLE FEATURES

	2 FO	4FO	6 FO	8 FO	12 FO
Outer diameter in mm	7,5	7,5	8,5	10	12
Weight in kg/km	60	60	80	100	120
Dynamic bend radius in mm	150	150	100	110	120
Operating temperature in°C	-5 à 70	-5 à 70	-5 à 70	-5 à 70	-5 à 70

BREAK-OUT CABLE REFERENCE

