

## GLOBE

### Range

By providing wide range of end fittings with fibre optic harnesses, LUXERI offers a guarantee of professional quality for all of your lighting projects.


Discreet, esthetically pleasing, they enable focusing and / or directing the light.

### Definition

« GLOBE » end fitting is rotating, made up of polished lens. Thanks to its rotating part, it is perfect for guiding lighting.

This end fitting exists with various finishing touches:

BLACK: *SPG50AL20P0N*  
 WHITE: *SPG50AL20P0B*  
 GOLDEN: *SPG50AL20P0D*  
 CHROME: *SPG50AL20P0C*  
 ANODIZED: *SPG50AL20P02*  
 INOX 316L: *SPG50AL20P20*

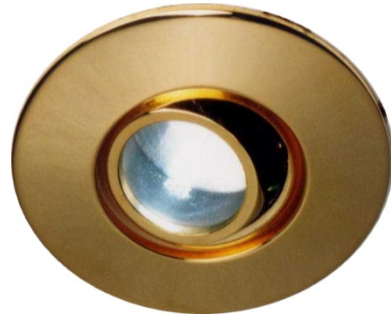

### Technical features

DATA	SPG50AL10PXX
Focalization (°)	From 14 to 22
Hole diameter (mm)	44
End ferrule	M10x100
Miscellaneous	Integrated with a system of springs
Photometry	2200 lux (22°) and 4900 lux (14°) at 50 cm With a generator 150 W HQI and a branch of 20 FOP Ø 1 mm
Dimensions	Fixed end fitting Ø 50 mm Orientation over 45°

#### Remarks:

Leave free gap of 90mm behind the end fitting in order to set optical fiber  
 Integrated in dividing wall of 10mm at maximum

LUXERI is specialized for more than 20 years in the sale of products with plastic fiber used in data transmission and in lighting. From the study of complex projects to the sale of quality products thanks to TORAY® fiber, LUXERI offers a wide range of products and services aimed at professionals and companies.